



LED条形光源系列

直接照射条形光源

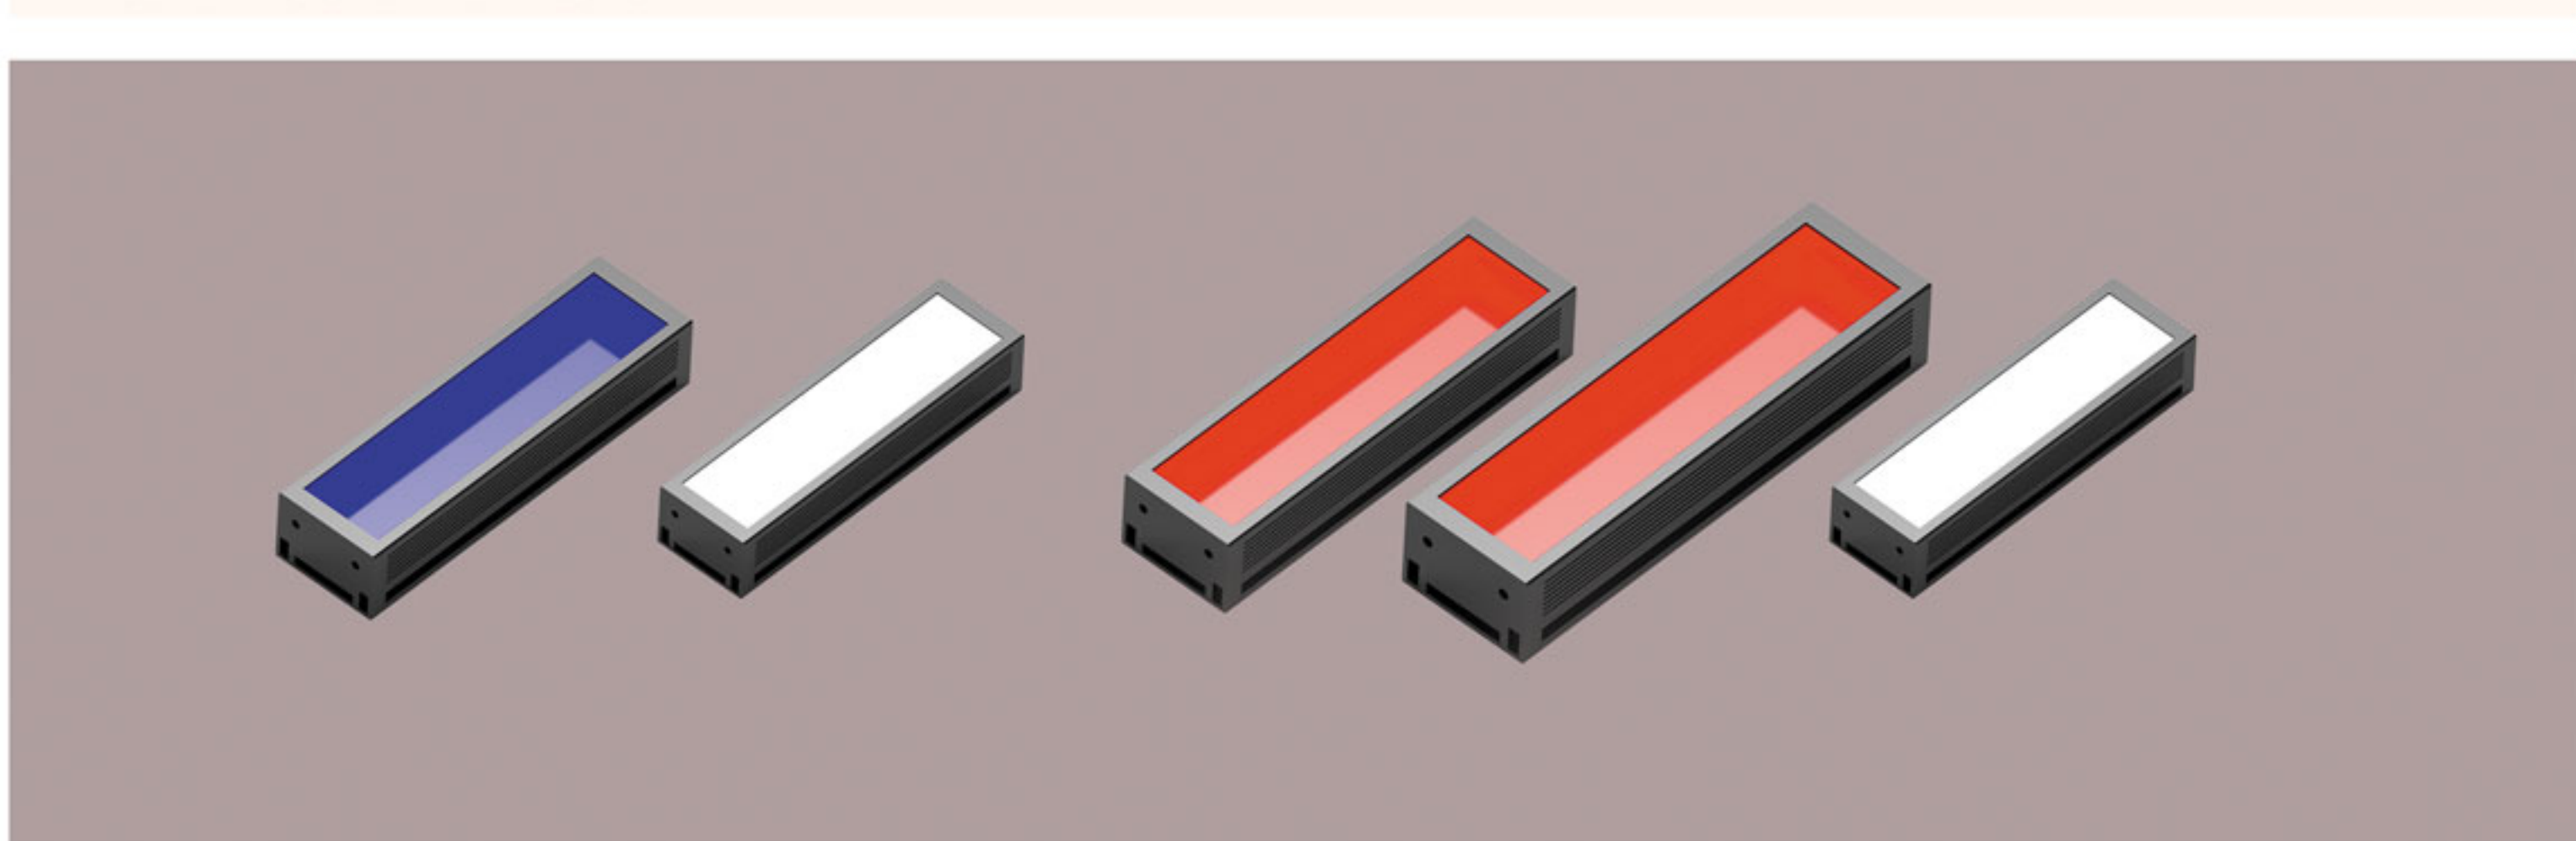

型号说明


Model: YL-L $\square\square\square\square$ - $\square\square$

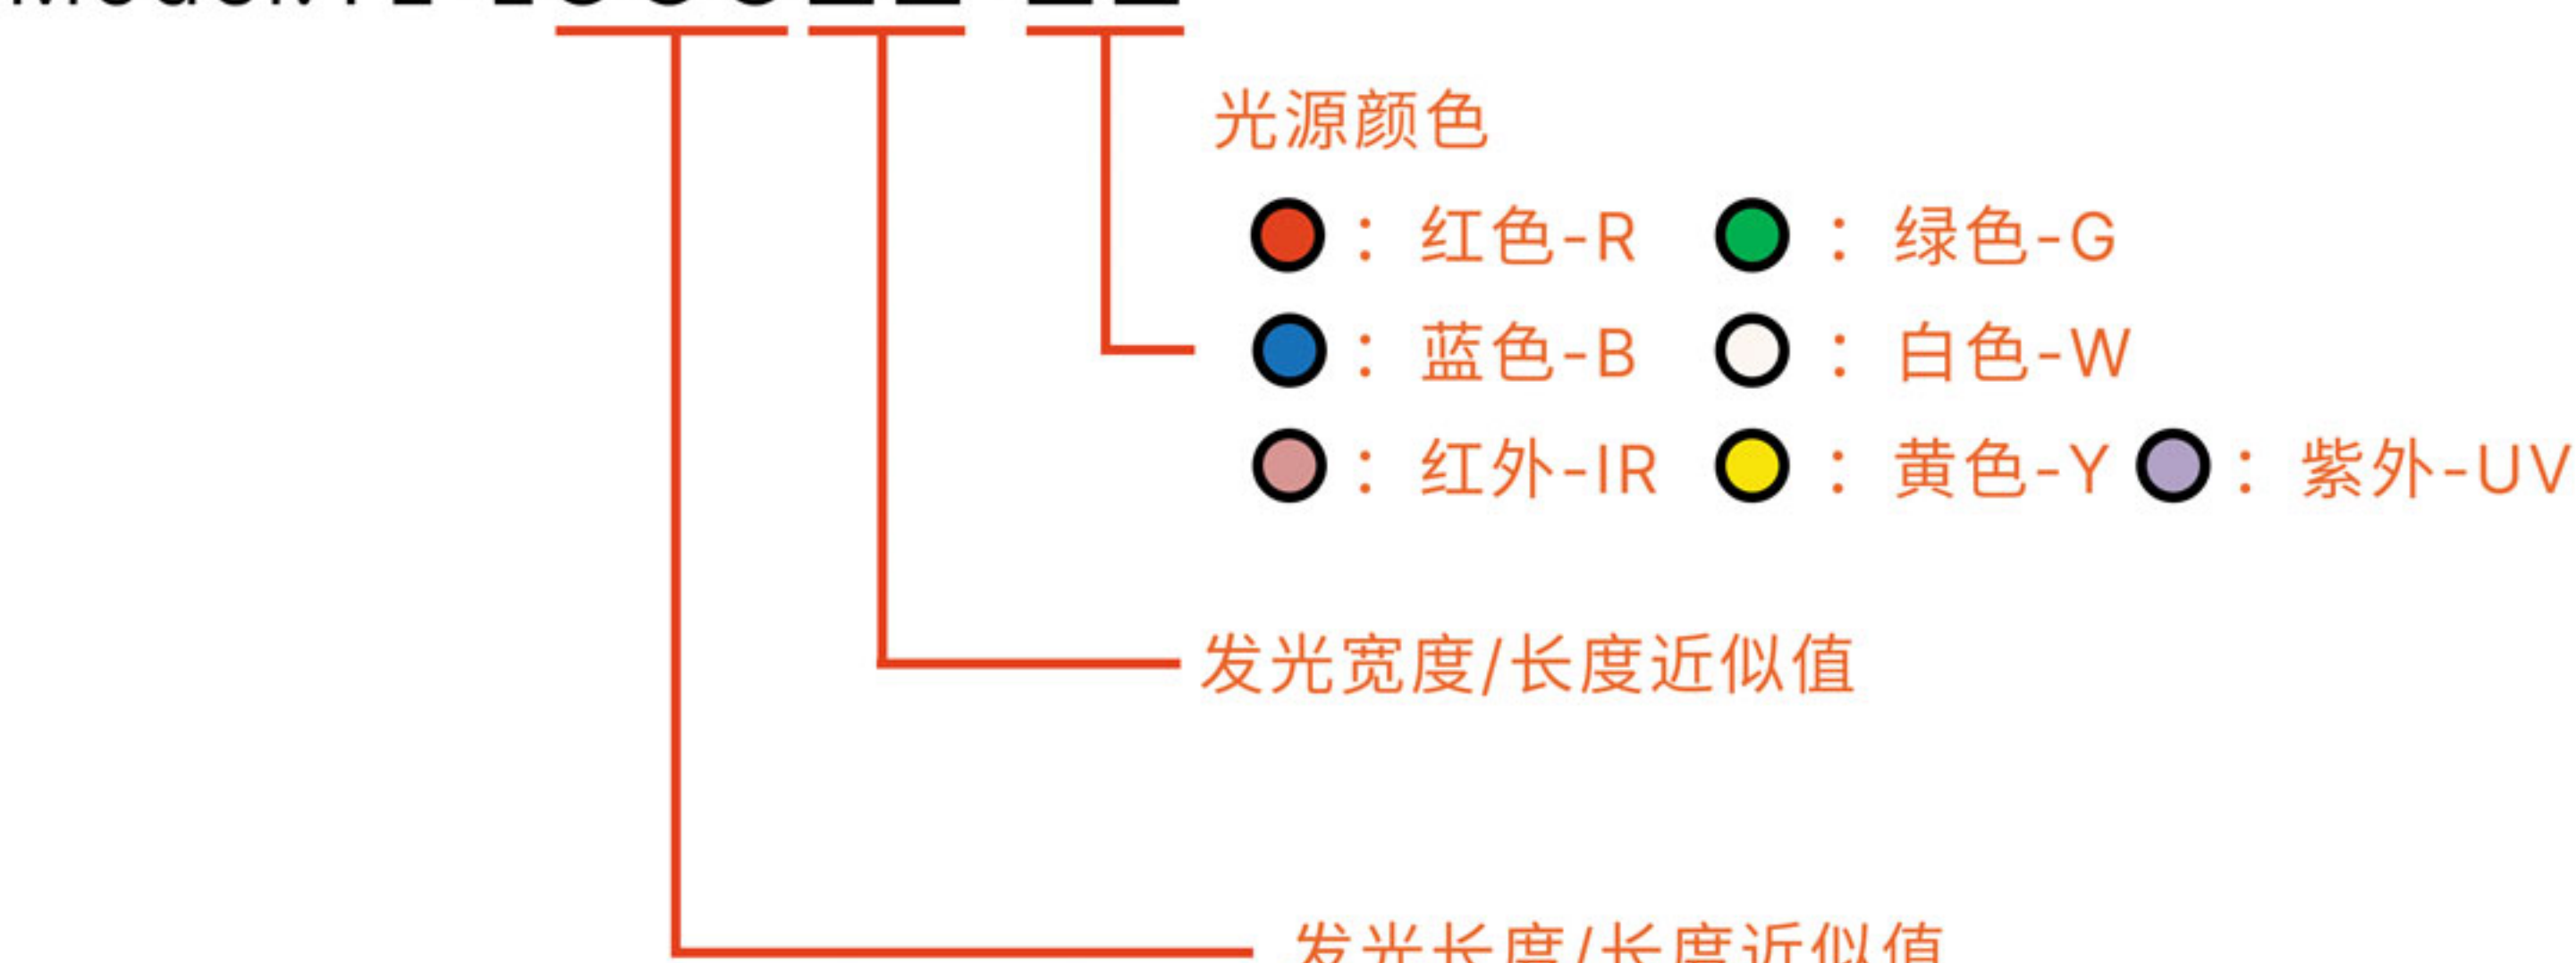

光源颜色: R(Red)/G(Green)/B(Blue)/W(White)/IR(850,940)/UV(365,390)Y(yellow)


外径(mm): 35,70,105,140,175,210,245,280,315,350,385,420

直接照射条形光源特点	应用领域
● LED高密度配置+光学透镜	● 基板裂纹与金属表面检测
● 均匀性好,可做背光使用	● 电子元件识别检测
● 红外,紫外制作	● 印刷品质量检测
● 标准24V供电	● 通用外观检查

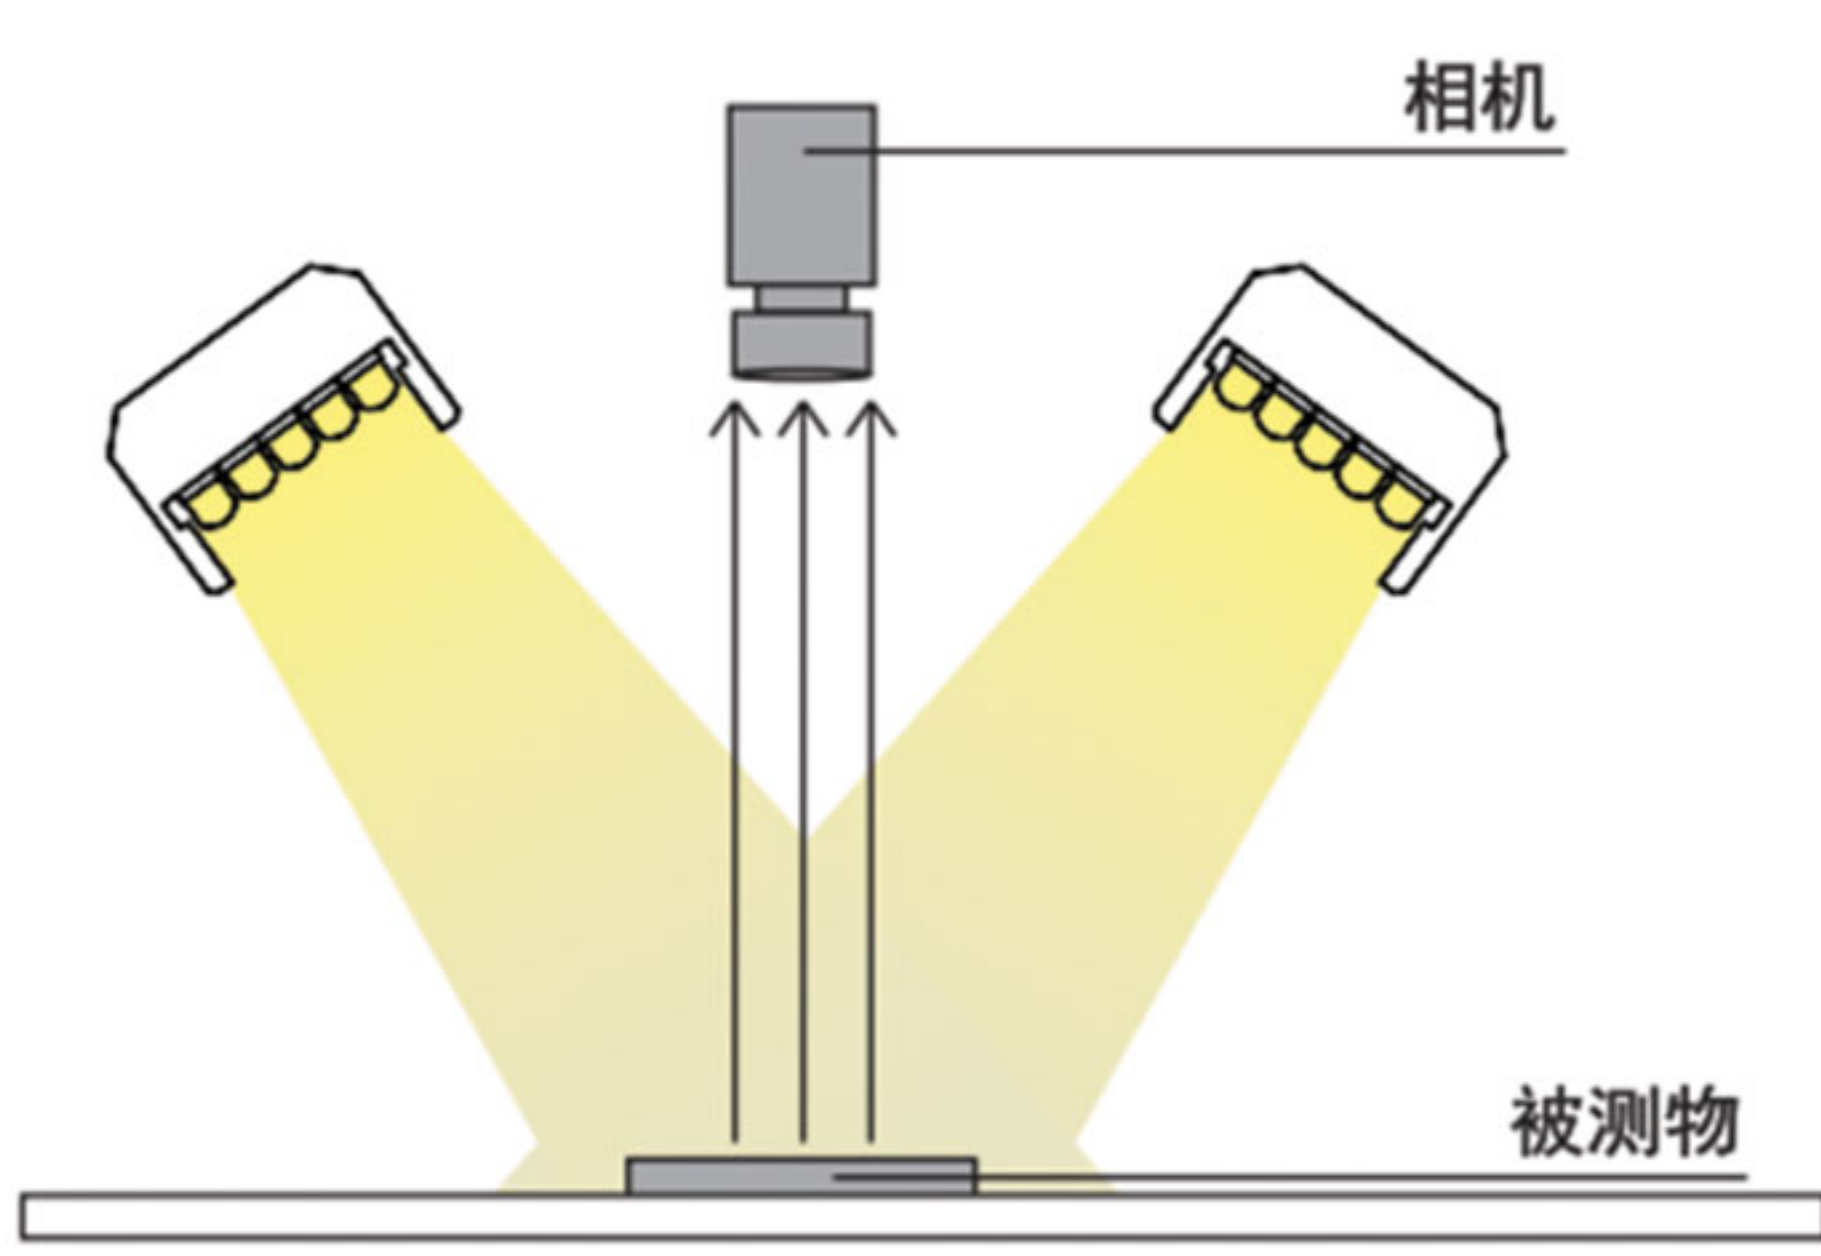

Model	A	B	电压(v)	功耗(w)	图号
YL-L3520-□□	35	20	24	1.8	1
YL-L3530-□□	35	30	24	2.8	
YL-L3545-□□	35	45	24	4.3	
YL-L7020-□□	70	20	24	3.6	
YL-L7030-□□	70	30	24	5.6	
YL-L7045-□□	70	45	24	8.6	
YL-L10520-□□	105	20	24	4.4	
YL-L10530-□□	105	30	24	8.4	
YL-L10545-□□	105	45	24	12.9	
YL-L14020-□□	140	20	24	6.2	
YL-L14030-□□	140	30	24	11.2	
YL-L14045-□□	140	45	24	17.2	
YL-L17520-□□	175	20	24	7.8	
YL-L17530-□□	175	30	24	14	
YL-L17545-□□	175	45	24	21.5	
YL-L21020-□□	210	20	24	9	
YL-L21030-□□	210	30	24	16.8	
YL-L-21045-□□	210	45	24	25.8	
YL-L-24520-□□	245	20	24	10.8	
YL-L-24530-□□	245	30	24	19.6	
YL-L-24545-□□	245	45	24	30.1	
YL-L-28020-□□	280	20	24	12.6	
YL-L-28030-□□	280	30	24	22.4	
YL-L-28045-□□	280	45	24	34.4	
YL-L-28055-□□	280	55	24	45	
YL-L-31520-□□	315	20	24	14.4	
YL-L-31530-□□	315	30	24	25.2	
YL-L-31545-□□	315	45	24	38.7	
YL-L-35020-□□	350	20	24	16.2	
YL-L-35030-□□	350	30	24	28	
YL-L-35045-□□	350	45	24	40	
YL-L-35055-□□	350	55	24	55	
YL-L-38520-□□	385	20	24	18	
YL-L-38530-□□	385	30	24	30.8	
YL-L-38545-□□	385	45	24	47.3	
YL-L-42020-□□	420	20	24	19.8	
YL-L-42030-□□	420	30	24	33.6	
YL-L-42045-□□	420	45	24	51.6	

条形光源尺寸 (mm)

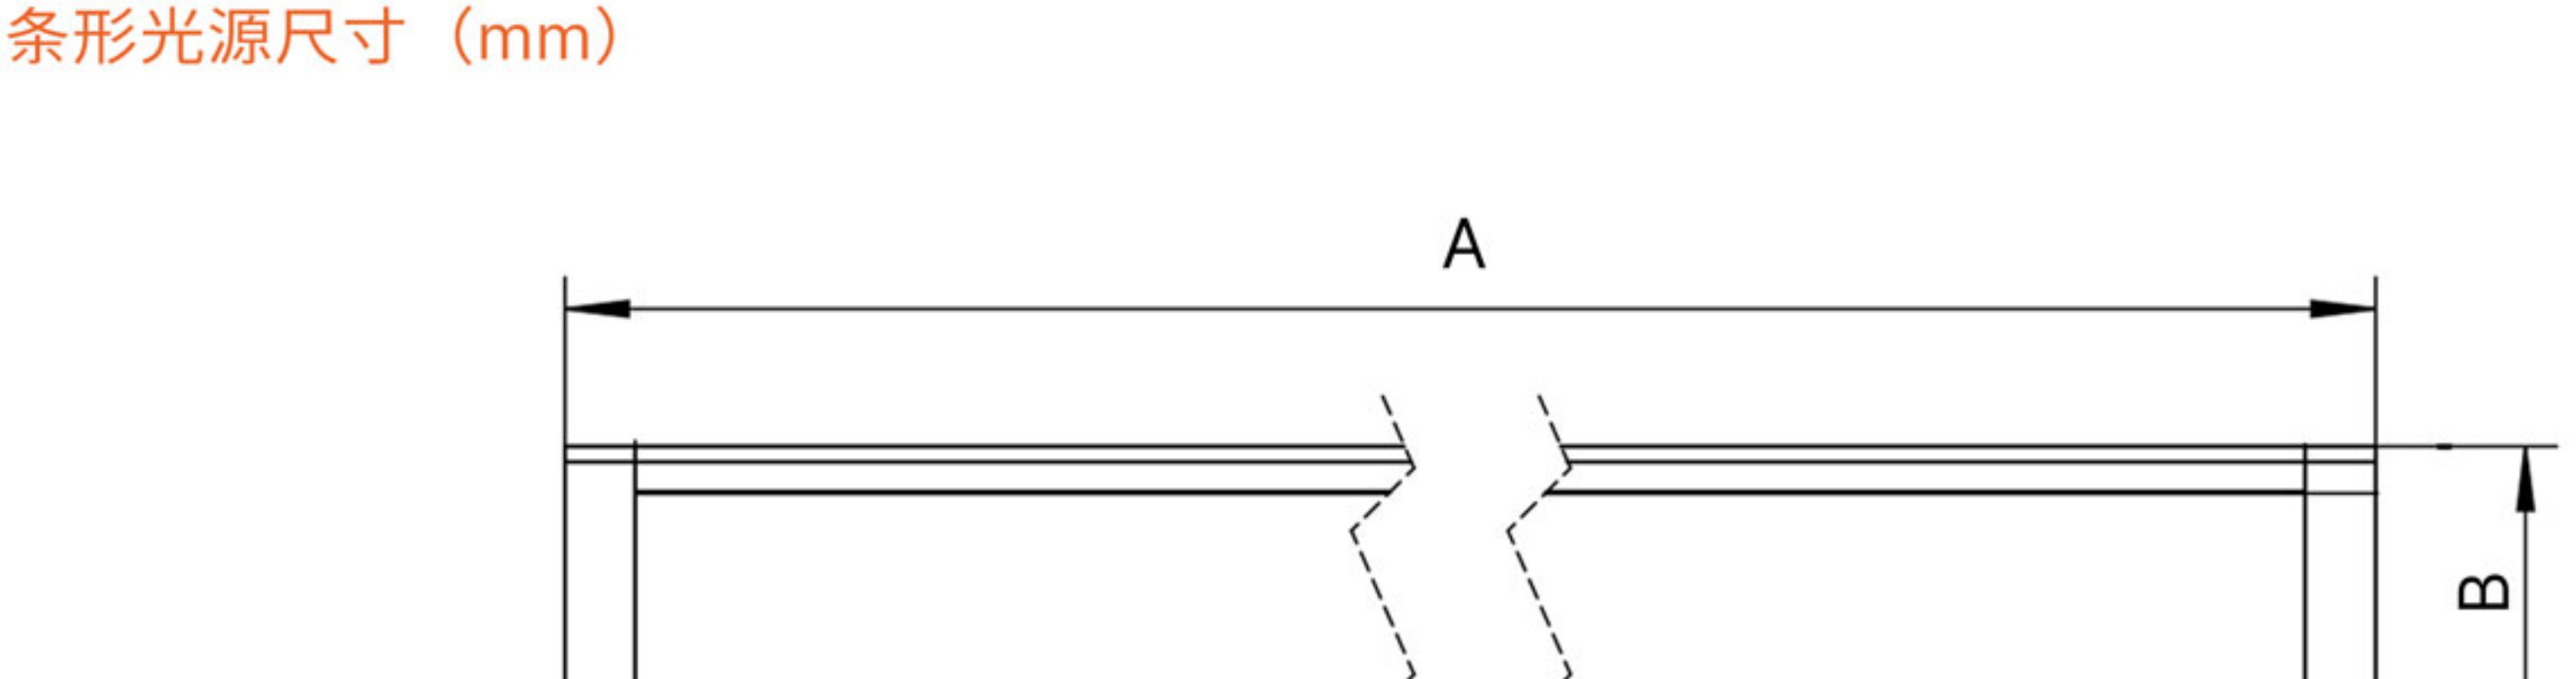

①