



高均匀条形光源GTR系列

高均匀条形光源 GTR Series

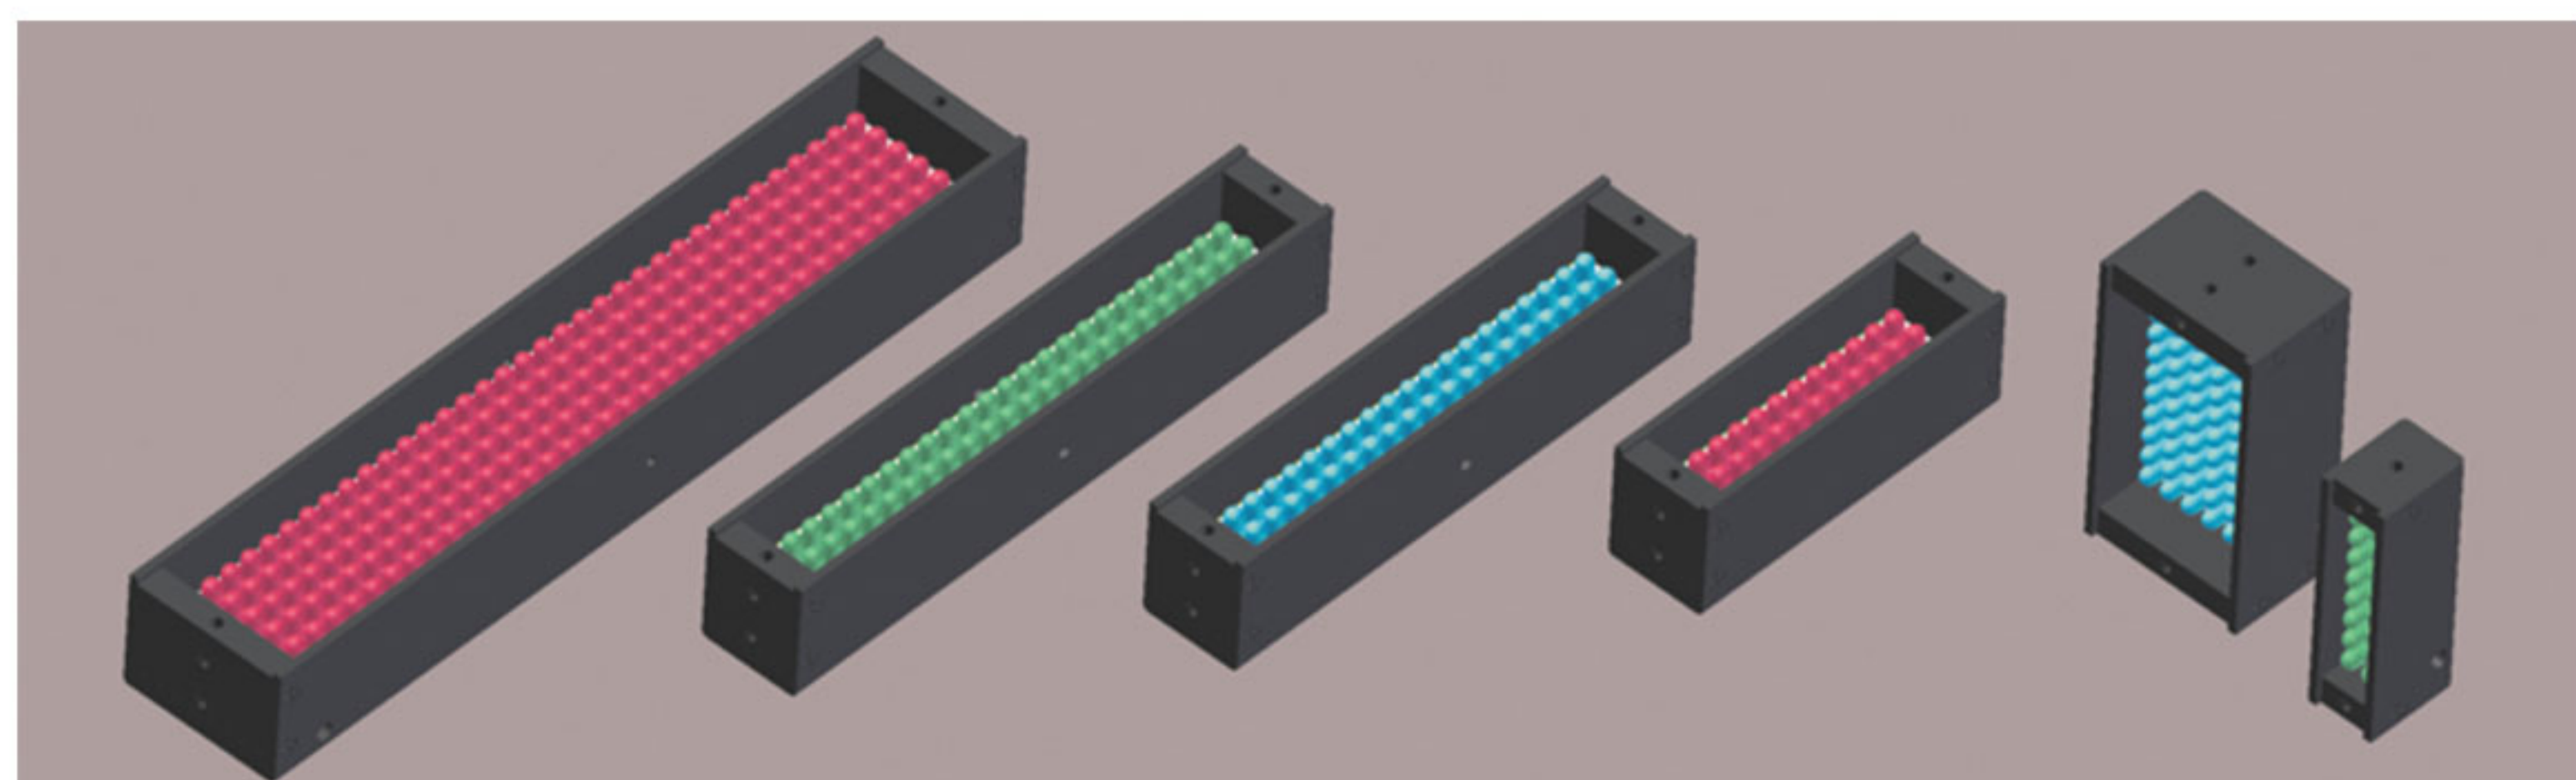

型号说明


Model: PL-GTR ○○ □□ - □□

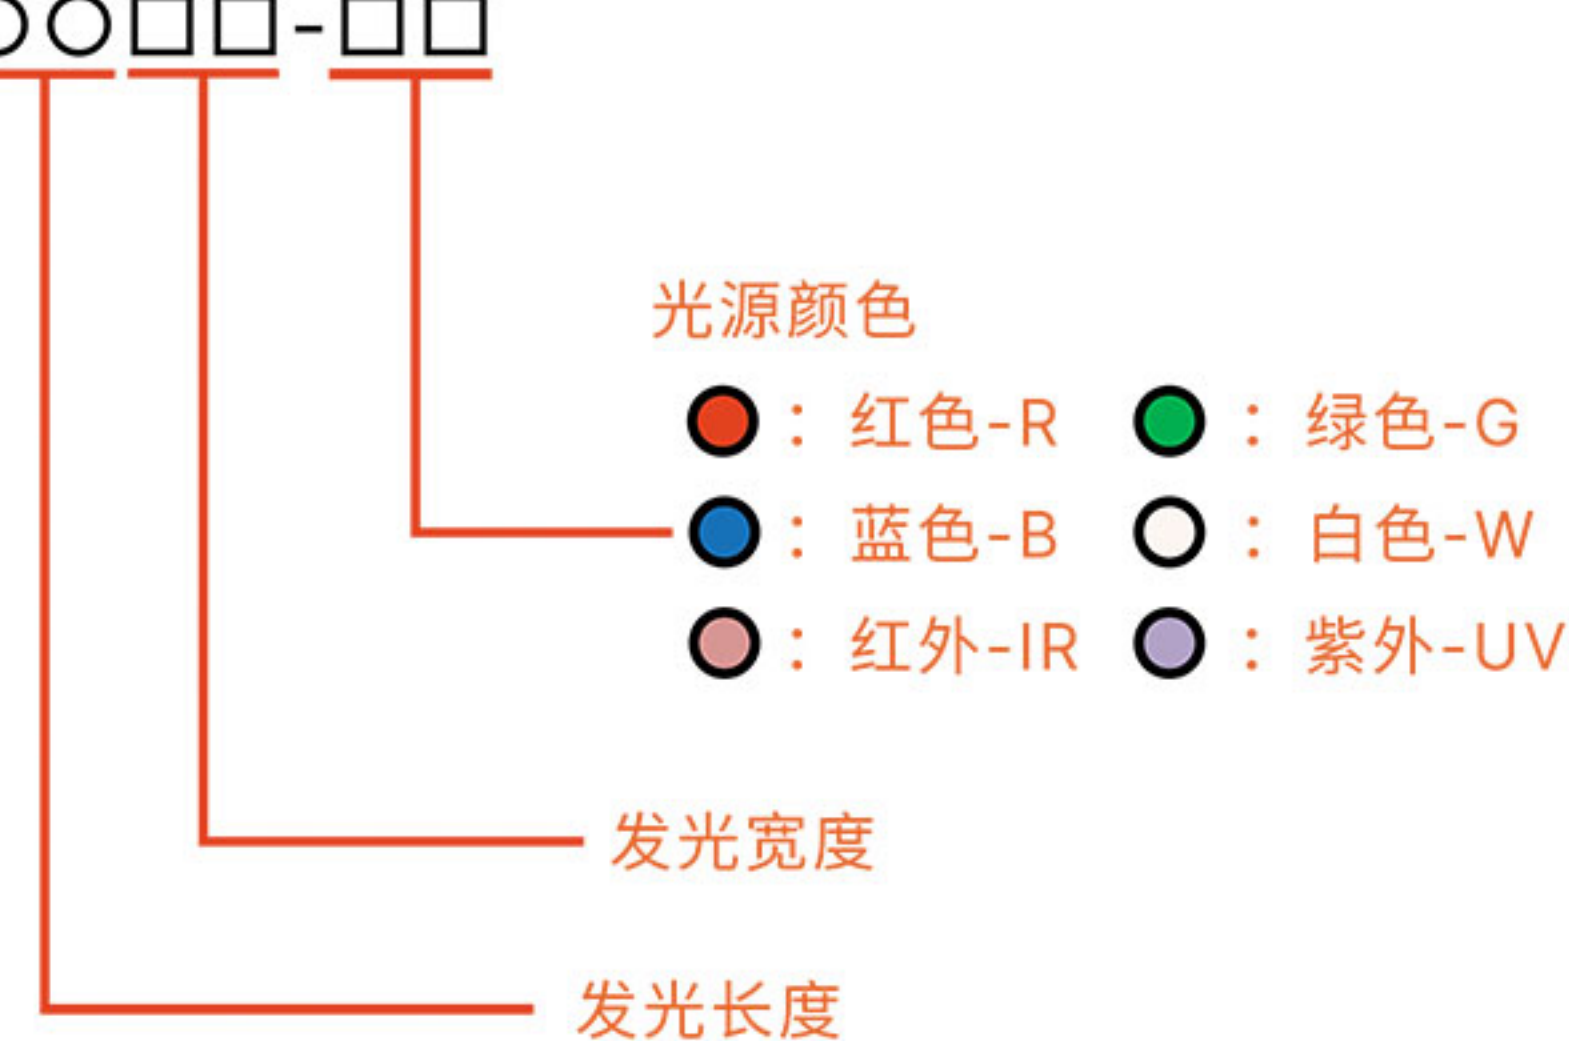

光源颜色: R(Red)/G(Green)/B(Blue)/W(White)/IR(850,940)/UV(365,390)

功耗: W,B,G,UV的功耗参照<功耗1> R,IR的功耗参照<功耗2>

GTR系列高均匀条形光源特点	应用领域
● LED高密度配置+光学透镜	● 反光面外观检测
● 均匀性好, 可做背光使用	● 可做长条形背光使用
● 红外, 紫外制作	● 大面积轮廓定位检测
● 标准24V供电 (12V可选)	● 覆膜包装检测定位

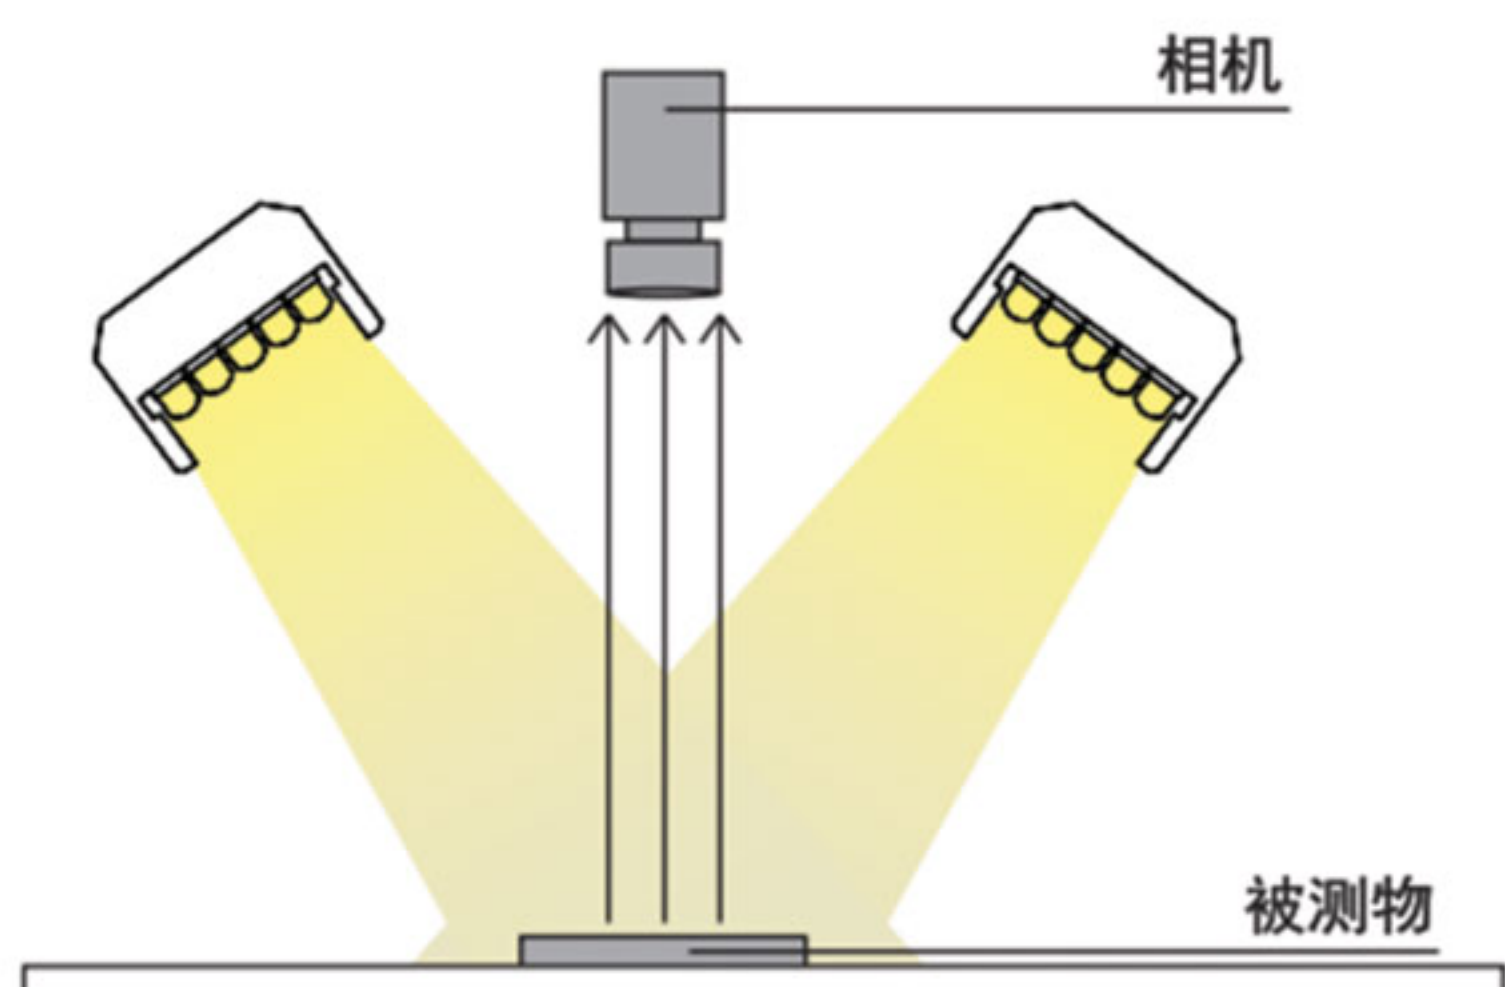

Model	A	B	C	D	E	F	G	功耗1(w)	功耗2(w)	图号
PL-GTR4528-□□	45	25	28	23	25	16	8	0.7	0.7	1
PL-GTR4535-□□	45	25	35	31	25	16	14	0.75	0.55	
PL-GTR5025-□□	50	40	25	20	20	10	10	1.7	1.1	
PL-GTR7025-□□	70	60	25	20	20	10	10	2.5	1.7	
PL-GTR7028-□□	70	50	28	23	25	16	8	1.4	1.4	
PL-GTR7035-□□	70	50	35	31	25	16	14	1.5	1.1	
PL-GTR9528-□□	95	75	28	23	20	16	8	2.1	2.1	
PL-GTR9535-□□	95	75	35	31	25	16	14	2.25	1.8	
PL-GTR12028-□□	120	110	28	23	25	16	8	2.8	2.8	
PL-GTR12035-□□	120	110	35	31	25	16	14	3	2.5	
PL-GTR14528-□□	145	125	28	23	25	16	8	3.5	3.5	
PL-GTR14535-□□	145	125	35	31	25	16	14	3.75	3.2	
PL-GTR16032-□□	160	148	32	22	18	10.5	12	5.8	3.8	
PL-GTR17028-□□	170	150	28	23	25	16	8	4.2	4.2	
PL-GTR17035-□□	170	150	35	31	25	16	14	4.5	3.9	
PL-GTR19528-□□	195	175	28	23	25	16	8	4.9	4.9	
PL-GTR19535-□□	195	175	35	31	25	16	14	5.25	4.6	
PL-GTR22028-□□	220	200	28	23	25	16	8	5.6	5.6	
PL-GTR22035-□□	220	200	35	31	25	16	14	6	5.3	
PL-GTR24528-□□	245	225	28	23	25	16	8	6.3	6.3	
PL-GTR24535-□□	245	225	35	31	25	16	14	6.75	6	
PL-GTR27028-□□	270	250	28	23	25	16	8	7	7	
PL-GTR27035-□□	270	250	35	31	25	16	14	7.5	6.7	
PL-GTR29528-□□	270	250	28	23	25	16	8	7.7	7.7	
PL-GTR29535-□□	295	275	35	31	25	16	14	8.25	7.4	
PL-GTR32028-□□	320	300	28	23	25	16	8	8.4	8.4	
PL-GTR32035-□□	320	300	35	31	25	16	14	9	8.1	

高均匀条形光源尺寸 (mm)

